



9. Adjustment

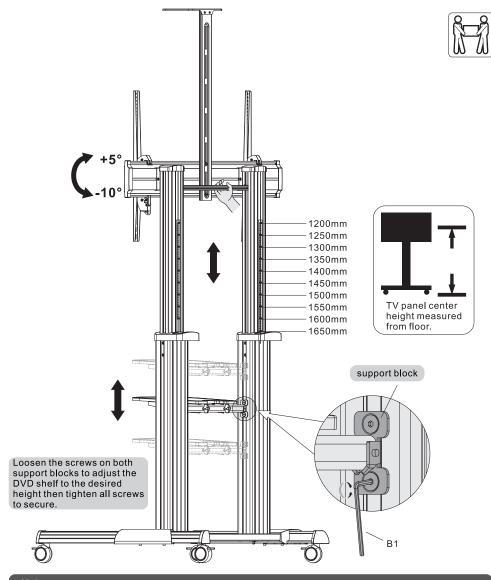

Maintenance

- Check that the bracket is secure and safe to use at regular intervals(at least every three months).
- Please contact your distributor if you have any questions.

TV Floor Cart and Accessories

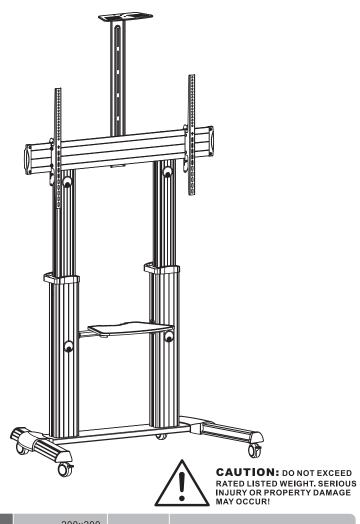

TTL04-610TW











ISSUED: NOV. 2015


⚠ WARNING


- Do not begin the installation until you have read and understood all the instructions and warnings contained in this installation sheet. If you have any questions regarding any of the instructions or warnings, please contact your local distributor.
- This mounting bracket was designed to be installed and utilised ONLY as specified in this manual. Improper installation of this product may cause damage or serious injury.
- Always use an assistant or mechanical lifting equipment to safely lift and position the equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can cause damage to the items, This greatly reduces their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation.

If any parts are missing or faulty, telephone your local distributor for a replacement.

TTL04-610TW

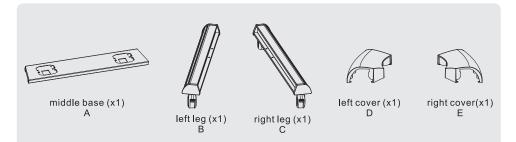


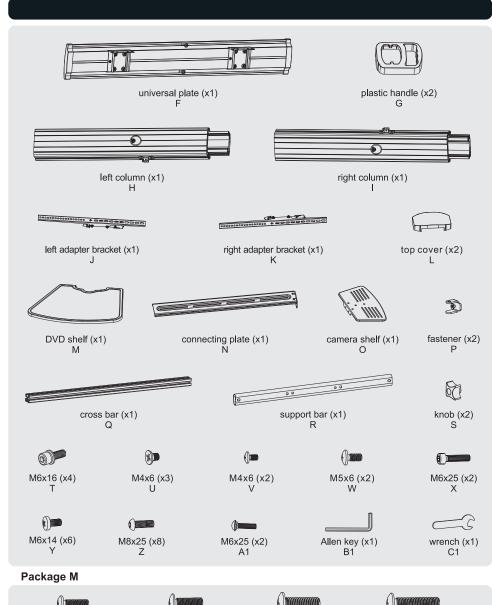




1 ♦♦♦

1. Assembling the Base

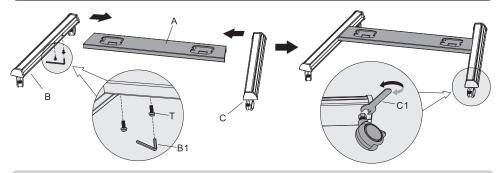


- Insert the right leg into the base. Align the holes in the right leg to the holes in the base. Secure with the screws. Repeat this step for the left leg.
 Each castor can be adjusted independently for fine tuning adjustments. Slightly turn the nut to lower or raise

2. Attaching the Column to the Base

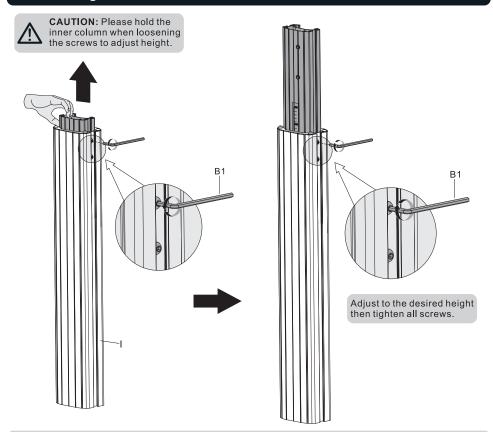


Repeat this step for the left column.

Note: Make sure both columns are at the same height using the height indicator as guide.

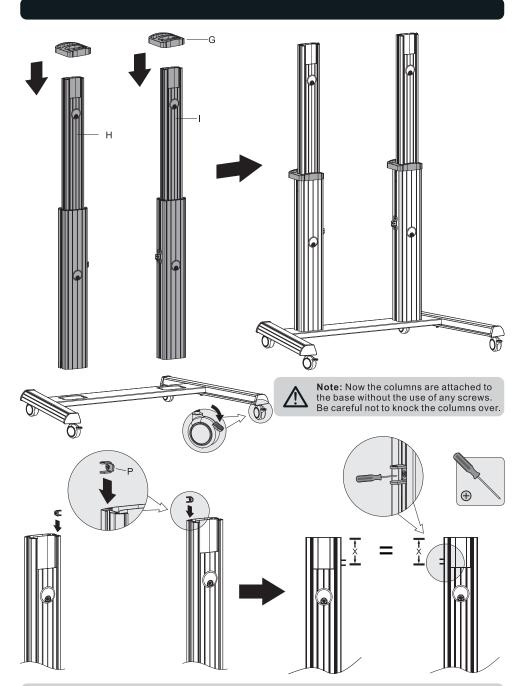



Insert the fasteners into the column rails.

Note: Make sure both fasteners are at the same height, then tighten screws on the fasteners to secure.

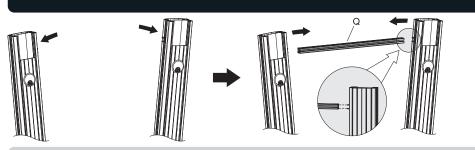



Attach the cross bar to the fasteners with the appropriate screws and tighten all screws using a Phillips screwdriver.

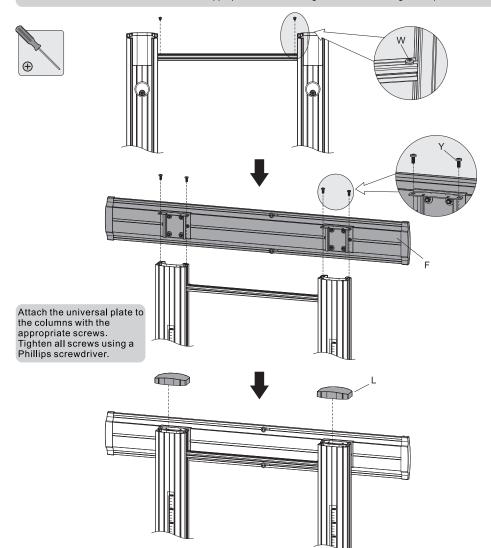

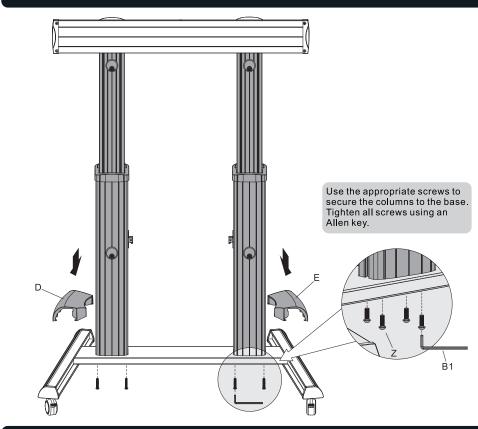


3. Assembling the DVD Shelf

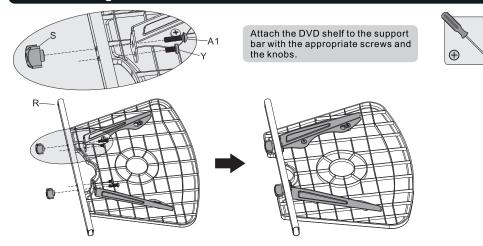

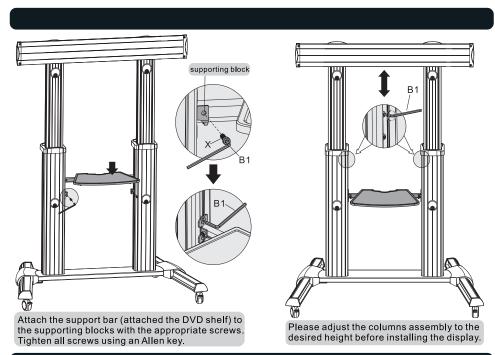


4. Installing the Adapter Brackets

4-1 For Flat Back Screens

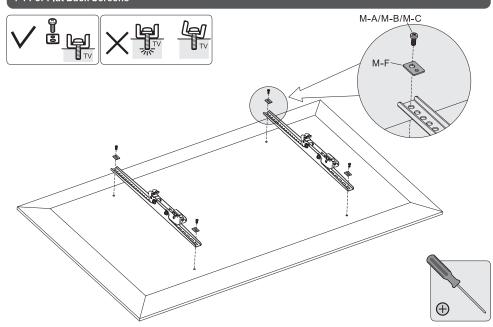

4-2 For Recessed Back Screens or to Access A/V Inputs

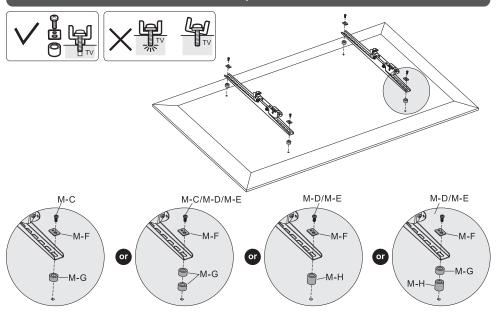


Note: Choose the appropriate screws, washers and spacers (if necessary) according to the type of screen.

- Position the adapter brackets as close as possible to the center of the display.
- Screw the adapter brackets onto the display.

Tighten all screws but do not over tighten.

5. Hanging the Display onto the Universal Plate

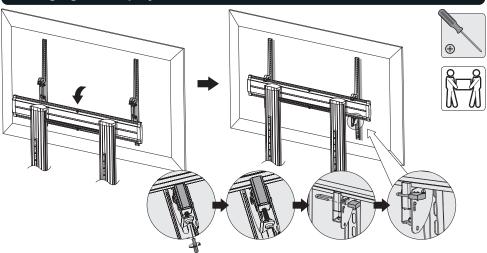

Hook the adapter brackets (attached the display) onto the universal plate.

Rotate the bottom screws counterclockwise to lock.


Rotate the bottom screws clockwise to unlock.

Use the padlock to prevent display from being stolen.(Padlock is not included.)


IMPORTANT: Make sure the display is correctly mounted before releasing the display.

7 ♦♦♦1


6. Cable Management

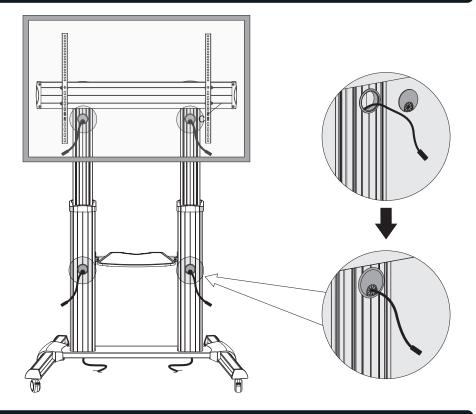

7. Installing the Camera Shelf

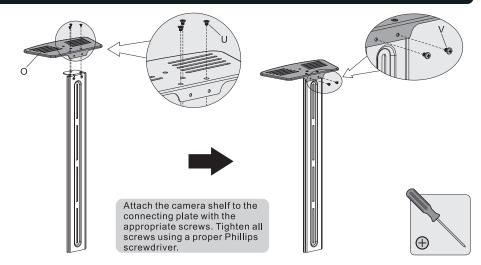

8. Installing the Connecting Plate

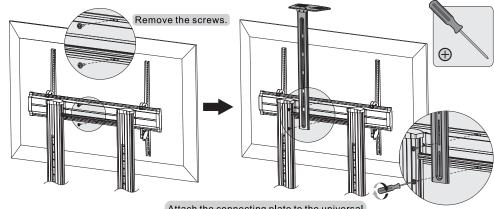

Attach the connecting plate to the universal plate with the removed screws. Tighten all screws using a proper Phillips screwdriver.

